
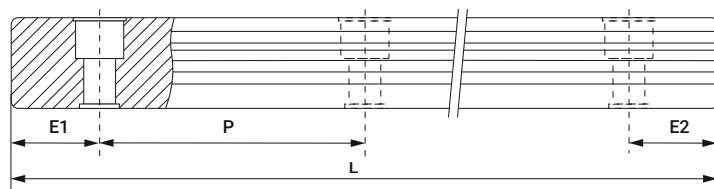


RG-R

Направляющий профиль
для роликовых кареток



Артикул	Размеры рельса, мм							Стандартная длина резов, мм										Длина поставки	Вес, кг/м
	WR	HR	D	h	d	P	E	L										L max	
RGR15	15	16,5	7,5	5,7	4,5	30	20	160 (5)	220 (7)	340 (11)	460 (15)	580 (19)	700 (23)	940 (31)	1120 (37)	1360 (45)	4000	1,8	
RGR20	20	21	9,5	8,5	6	30	20	220 (7)	280 (9)	340 (11)	460 (15)	640 (21)	820 (27)	1000 (33)	1180 (39)	1360 (45)	4000	2,76	
RGR25	23	23,6	11	9	7	30	20	220 (7)	280 (9)	340 (11)	460 (15)	640 (21)	820 (27)	1000 (33)	1240 (41)	1600 (53)	4000	3,08	
RGR30	28	28	14	12	9	40	20	280 (7)	440 (11)	600 (15)	760 (19)	1000 (25)	1640 (41)	2040 (51)	2520 (63)	3000 (75)	4000	4,41	
RGR35	34	30,2	14	12	9	40	20	280 (7)	440 (11)	600 (15)	760 (19)	1000 (25)	1640 (41)	2040 (51)	2520 (63)	3000 (75)	4000	6,06	
RGR45	45	38	20	17	14	52,5	22,5	570 (11)	885 (17)	1200 (23)	1620 (31)	2040 (39)	2460 (47)	2985 (57)	3090 (59)	-	4000	9,97	
RGR55	53	44	23	20	16	60	30	780 (13)	1020 (17)	1260 (21)	1500 (25)	1980 (33)	2580 (43)	2940 (49)	3060 (51)	-	4000	13,98	
RGR65	63	53	26	22,2	18	75	35	1270 (17)	1570 (21)	2020 (27)	2620 (35)	-	-	-	-	-	4000	20,22	

Рельс	Болт крепления рельса	Резьба крепления	Момент затяжки N-см		
	(мм)		В сталь	В чугун	В алюминий
RGR15	M4x16	M4 × 0.7P×16L	392	274	206
RGR20	M5x20	M5 × 0.8P×20L	883	588	441
RGR25	M6x20	M6 × 1P×20L	1373	921	686
RGR30	M8x25	M8 × 1.25P×25L	3041	2010	1470
RGR35	M8x25	M8 × 1.25P×25L	3041	2010	1470
RGR45	M12x35	M12×1.75P×35L	11772	7840	5880
RGR55	M14x45	M14×2P×45L	15696	10500	7840
RGR65	M16x50	M16×2P×50L	19620	13100	9800